


FAST FLOW PUMPS

4" x 6" Ductile Iron Discharge Adapter Pump

Fast Facts

- 198lbs / 89kg
- 1150GPM / 4353LPM Water Flow
- 200ft / 61m Vertical Head
- 2250-3500PSI / 155-241 Bar
- 8-32 GPM Hydraulic Flow
- 6" Male Camlock Adapter
- 36" x 16" x 22" / 91cm x 40cm x 55cm
- AW-32 or AW-46 Hydraulic Fluid

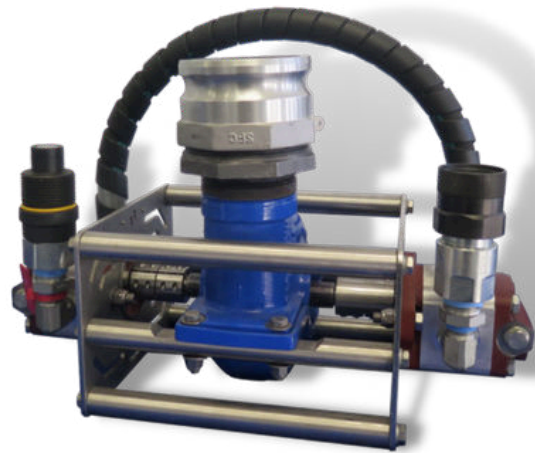

4" X 6" DUCTILE IRON DISCHARGE ADAPTER PUMP

More Information

Features

- Very High Flow Rates
- High Vertical Head Pressure
- Self Priming
- Run Dry Technology
- Variable Speed & Flow
- Small Portable Size
- Heavy Solids Pump
- NO Internal Friction
- NO Mechanical Seals

Competitive Advantages

- Drill rig well cellar pumping
- Handles abrasive solids pumping applications
- Pump 20lb(9kg) per gallon(3L) oilfield slurries
- Anti-clog twin motor, double suction technology
- Lightweight dredge at 230LBS (104kg)
- Durable steel pump parts for long life
- Cost effective compared to other pumps

The Fast Flow 4X6 DTM Pump is designed to pump difficult to pump media where other pumps experience mechanical seal failure. Two efficient self-lubricated hydraulic gear motors power the pump and are specifically engineered to keep contaminants out. There are absolutely no wear plates, mechanical seals, and impeller to housing contact.

Applications



- Oilfield applications
- Solids slurry pumping
- Papermill Pulp
- Black Liquor
- White Liquor
- Barge pumping
- Oil storage maintenance
- Heavy crude pumping
- Refinery tank cleaning

