


# FAST FLOW PUMPS

## 3" Ductile Iron Single Motor Pump

### Fast Facts

- 42lb / 19kg
- 600GPM / 2271LPM Water Flow
- 300ft / 91.4m Vertical Head
- 2250-3300PSI / 155-227 Bar
- 4-21GPM / 15-79LPM Hydraulic Flow
- 3" Male Cam Lock
- 16" x 10" x 11" / 40cm x 25cm x 28cm
- AW-32 or AW-46 Hydraulic Fluid

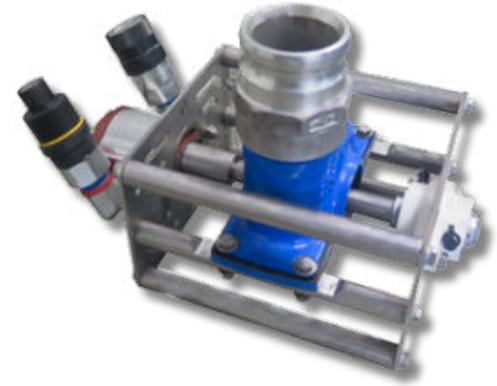

3" DUCTILE IRON SINGLE MOTOR PUMP

## More Information

### Features

- Very High Flow Rates
- High Vertical Head Pressure
- Self Priming
- Variable Speed & Flow
- Small Portable Size
- Durable Ductile Iron
- NO Mechanical Seals
- Fits in Manhole
- NO Internal Friction
- Low Maintenance Design

### Competitive Advantages

- Lightweight and portable at 42 LBS (19 kg)
- Durable cast ductile iron for long life
- Single person can lift and position
- Pumps 100BBL of 15 lb (6kg) drill mud in 12 min
- Field service in under an hour
- Anti-clog double suction technology
- Pumps heavy oilfield drill mud & solids



The Fast Flow 3" Ductile Iron Single Motor Pump is engineered for high-performance dewatering and fluid transfer in the most demanding environments. Built with a rugged ductile iron body, this pump delivers superior strength and impact resistance, making it ideal for tough applications such as mining, construction, industrial cleanup, and municipal utility work.

### Applications



- Mud slurry pumping
- Frac tank cleaning
- Reserve pit pumping
- Refinery tanks
- Heavy solids pumping
- Oil spill response & skimmer
- Drill mud mixing

