


# FAST FLOW PUMPS

## 6" Heavy Slurry Ductile Iron Pump

### Fast Facts

- 486lbs / 221kg
- 2000GPM / 757LPM Water Flow
- 125ft / 38m Vertical Head
- 3000 - 4000PSI / 206-275 Bar
- Up to 48 GPM / 181 LPM Hydraulic Flow
- 6" Male Camlock
- 44" x 22" x 22" / 112cm x 56cm x 56cm
- AW-32 or AW-46 Hydraulic Fluid

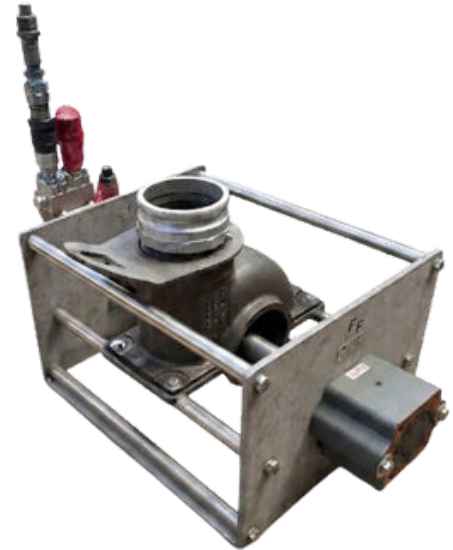

6" HEAVY SLURRY  
DUCTILE IRON PUMP

## More Information

### Features

- Heavy-Duty Submersible Design
- High-Volume Sludge & Slurry Handling
- Rugged Mechanical Seals & Bearing Assembly
- Self-Priming Capabilities
- Variable Hydraulic Speed & Flow Control
- Clog-Resistant Impeller System
- Run Dry Capable
- No Cavitation Damage

### Competitive Advantages

- Submersible operation eliminates suction lift limitations
- Powerful hydraulic drive handles heavy solids with ease
- Durable Ductile Iron pump housing and components for extended service life
- Small portable footprint with massive flow capacity
- Cost-effective alternative to traditional vacuum trucks, dredges, and more!

The Fast Flow 6" heavy-duty hydraulic submersible pump is engineered to tackle the most demanding sludge and slurry operations. It is specifically designed to withstand harsh, abrasive environments. Powered by a highly efficient hydraulic motor, it delivers reliable, high-volume performance and maximum durability for the toughest pumping applications.

### Applications



- Heavy Sludge & Solids
- Municipal Sewage Solids
- Oilfield Drill Cuttings
- Mining & Dredge Pumping
- Tank Cleaning
- Papermill Pulp
- Barge & Pit Emptying
- Clarifier Pumping

### Contact Us

